

600x600mm
DOUBLE CHARGE
VITRIFIED TILES

605x605mm
VITRIFIED TILES

New wave of
CREATIVITY!



Simolex Ceramic Pvt. Ltd.
8-A, National Highway, Makansar,
Morbi-363 642 Dist. Rajkot (Gujarat) India.

Customer Care:
m: 99099 59981/2/3

w: www.simolex.in
e: simolex.cera@gmail.com






Artic White




Artic Gold

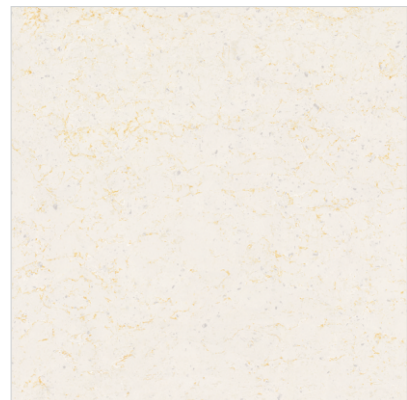

Platinum Gold



Platinum Pista

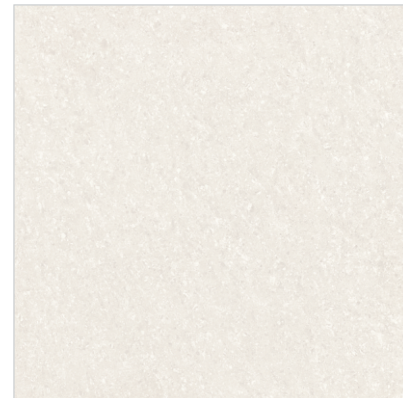


Precio White




Precio Pink



Precio Beige

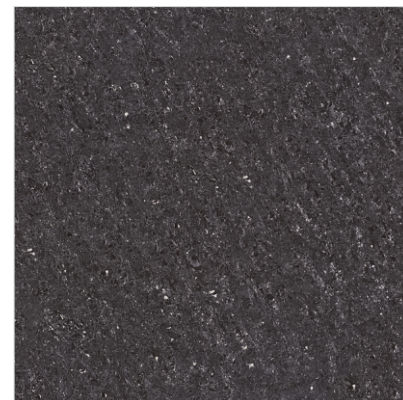

Precio Black

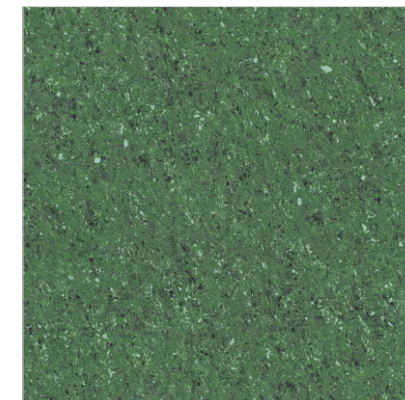

Precio Green



Precio Golden Brown





605 x 605 mm
VITRIFIED TILES



Niilo




Vintage




Silk



605 x 605 mm
VITRIFIED TILES

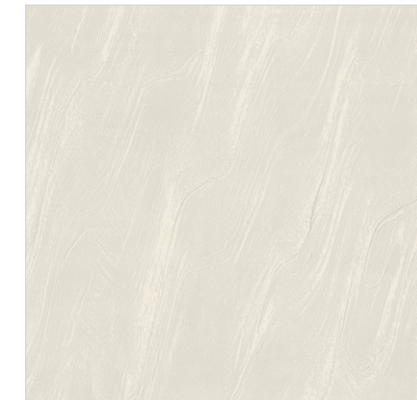


Onice Grey

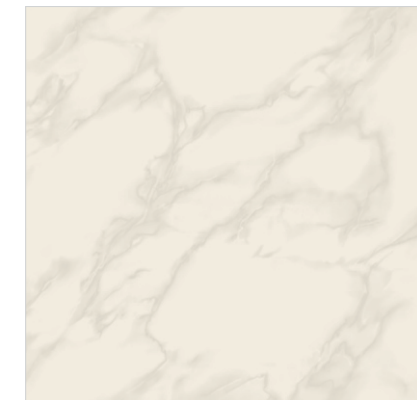

Marfil



Cloud

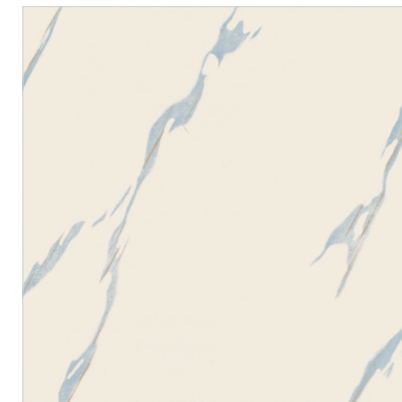

Habitat



Jasper




Onice




Marmol



Natural

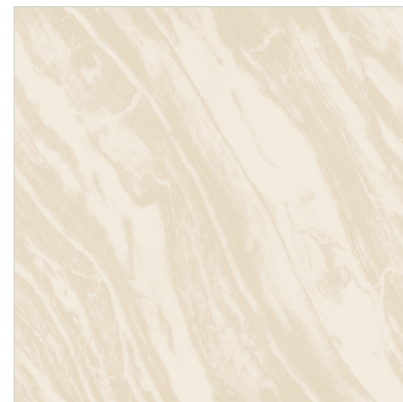


Lawa

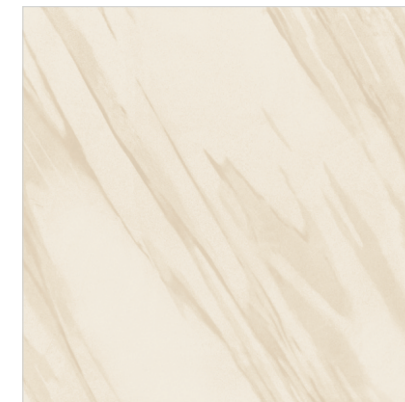

Lotus




Talis

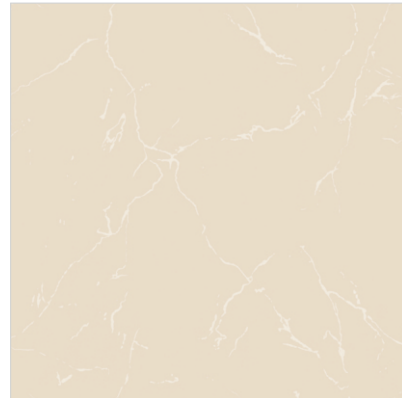

Luci



Magma

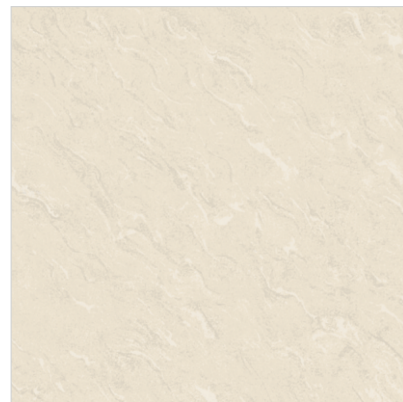

Polar



Toscano



Papa



Nexus



Beton



Fresco



Teak



Nivea




Touch





Spark

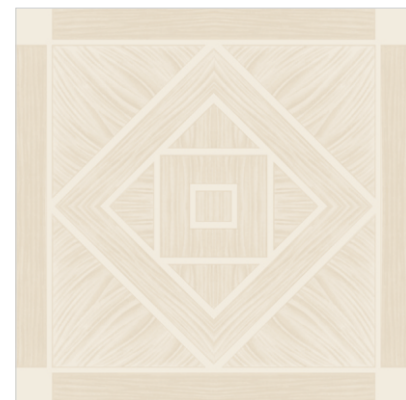


Stilo




Style



Terra Cotta



White



Ivory



Technical Specification

PROPERTY	International Std. ISO 13006/EN 176 Group Bla	SIMOLEX Value	Method of Testing
Deviation in Length	±0.6%	±0.1%	EN 98
Deviation in Thickness	± 5%	± 4%	EN 98
Straightness of Sides	±0.5%	±0.1%	EN 98
Rectangularity	±0.6%	±0.2%	EN 98
Surface Flatness	±0.5%	±0.2%	EN 98
Water absorption *	<0.5%	<0.03%	EN 99
Mohs hardness *	> 6	> 8	EN 101
Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
Abrasion resistance	< 204 mm ³	< 144 mm ³	EN 102
Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
Breaking Strength *	1113 N	2830 N	ASTM C-648
Density (g/cc)	> 2	2.4	DIN 51082
Frost resistance	Frost proof	Frost proof	EN 202
Chemical Resistance	No damage	No damage	EN 106
Thermal Shock Resistance	No damage	No damage	EN 104
Colour Resistance	No damage	No damage	DIN 51094
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
Stain Resistance	Resistant	Resistant	ISO 10545-14
Moisture Expansion	Nil	Nil	ISO 10545-10
Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Packing Details

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
605x605mm (SS)	8.0 mm (approx.)	4 pcs.	1.46 sq. mt.	26 Kgs. (approx.)
600x600mm (DC)	8.0 mm (approx.)	4 pcs.	1.44 sq. mt.	26 Kgs. (approx.)